


Octa Rail 26072

The alternative to the U-shaped mounting rail!
For all tube diameters from 12 - 22 mm (3/8" - 3/4")
as well as for oval tubing 17 x 24 mm

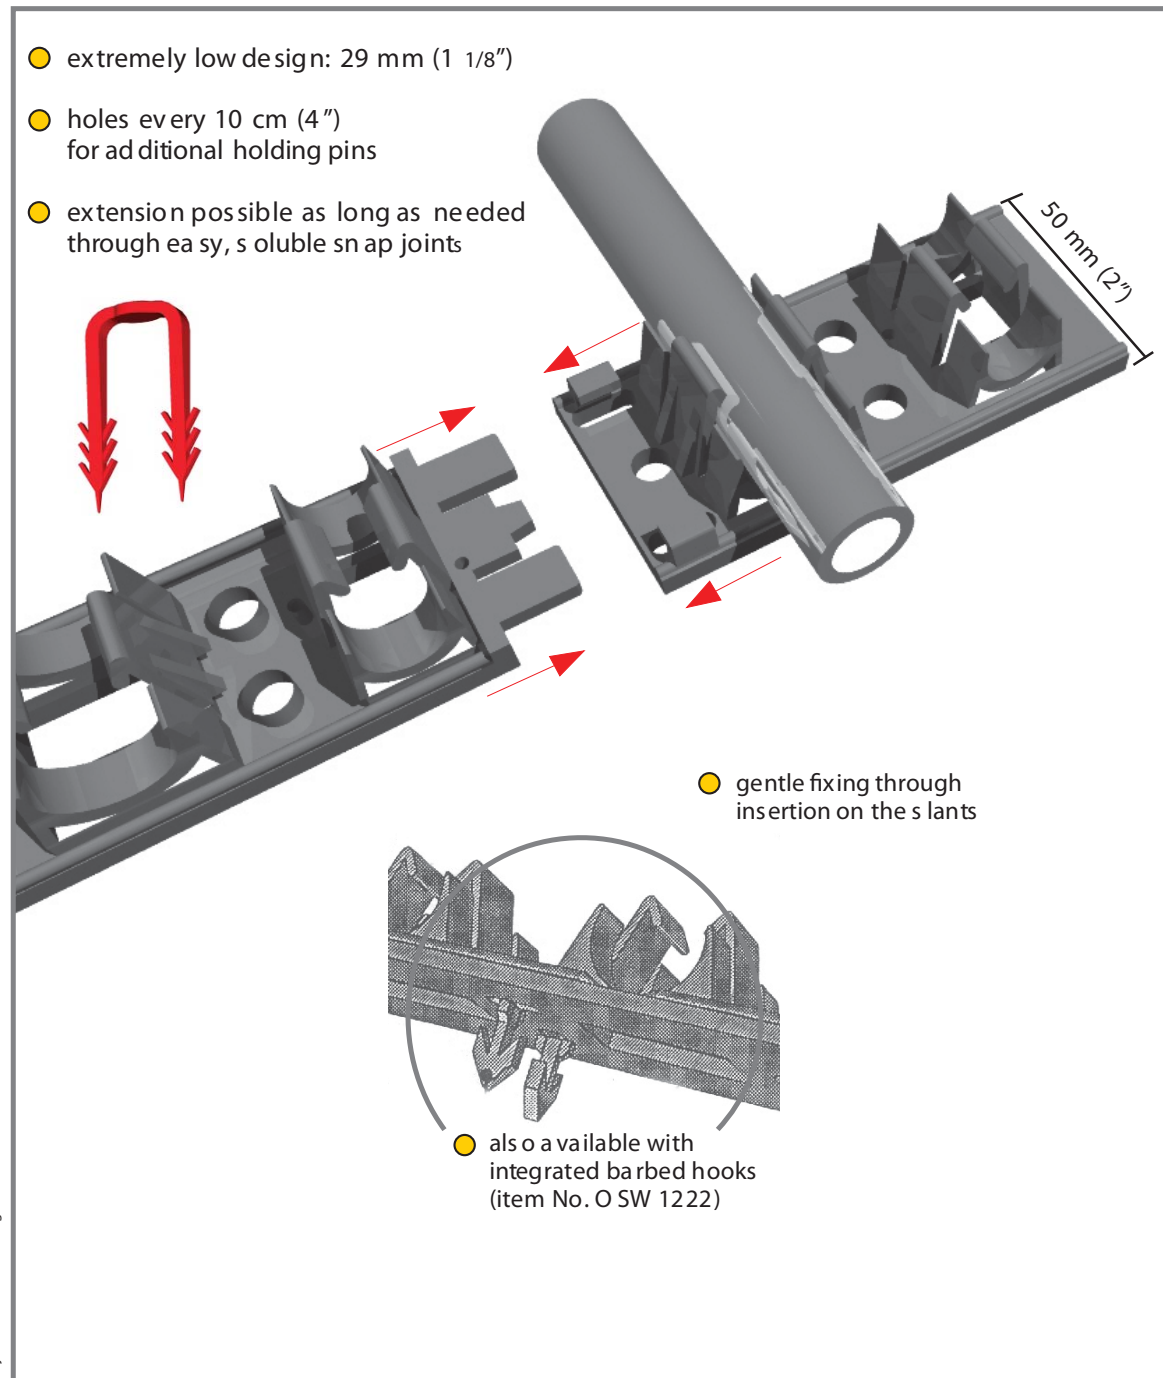

Octa Rail 26072

- perfectly fitted tubing with a slight rising of the tube
- provided with holes for fixing through plastic nails or holding pins
- extension possible as long as needed through soluble snap joints
- the tube intake is suitable for all tube diameters from 12 mm to 22 mm (3/8" - 3/4") as well as for oval tubing 17 x 24 mm - only reduced stock necessary!
- the special high-quality material is free of softening agent and PVC
- available with adhesive tape if requested

Technical Data

the small tube intake is suitable for tube OD

12 mm
12,7 mm (3/8")
13 mm
14 mm
15 mm
16 mm (1/2")
17 mm
18 mm

the big tube intake is suitable for tube OD

16 mm (1/2")
17 mm
18 mm
19,1 mm (5/8")
20 mm
22,2 mm (3/4")
as well as for oval tubing 17 x 24 mm
OD

tube distance for tube OD

16 mm (1/2")
17 mm
18 mm } 5 cm (2")

tube distance for tube

12 mm
12,7 mm (3/8")
13 mm
14 mm
15 mm
19,1 mm (5/8")
20 mm
22,2 mm (3/4")
as well as for oval tubing 17 x 24 mm } 10 cm (4")

colour:

quantity of octa rail needed:

length of octa rail:

packing/weight:

black

approx. 3 1/4 ft per 10 3/4 ft² underfloor heating

bars à 3 1/4ft - to make fitting connection

328 ft each carton = approx. 50,6 lbs.

15 cartons each pallet = 4920 ft =

approx. 759 lbs.

Octa Rail 26072

Subject to technical changes